



Changes for the Better

MULTIMEDIA DATA/VIDEO PROJECTORS

**In today's office
do you need something**

stylish, bright,
fully-featured
and compact?

well, here she is



multimedia data/video projector

TECHNICAL SPECIFICATIONS

Display technology	0.7" Polysilicon panel x 3 (with MLA)
Resolution	1024 x 768 (total 2,359,296 pixels), 600 video lines
Brightness	2000 lm
Colour	16,770,000 colours
Zoom / focus	Manual control (zoom ratio 1.2:1)
Picture size	40" ~ 300" (100" = 3.7m)
Source lamp	180W / 2000hrs (normal mode), 160W / 3000hrs (low mode)
Computer compatibility	VGA * ~ SXGA * (640 x 480 ~ 1280 x 1024), True: 1024 x 768, Sync on green available
Video compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N), SECAM / PAL 60 / Component Video (DVD / HDTV), (480i, 576i, 480p, 576p, 720p, 1080i), SCART (RGB + 1V sync)
Input terminals	PC: mini D-sub 15 pin x 1, Video: RCA + S-Video x 1, Audio: RCA (L, R) x 1
Output terminals	RGB: mini D-sub 15 pin x 1
Communication terminals	RS-232C x 1 (8pin), mouse terminal for USB
Audio speaker	2 W Mono
Dimensions (W x H x D)	275 x 70 x 261 mm / 10.8" x 2.8" x 10.3" (Excluding all protrusions)
Weight	2.7 kg / 5.9 lbs
Power supply	AC 100 ~ 240 V / ±10%, 50/60 Hz

GREAT FEATURES IN COMPACT BODY

- 3000Hrs Lamp Life (low mode)
- Automatic Vertical/Horizontal Digital Keystone Correction
- Anti-Theft Password
- Lightweight, Slim Design
- Dynamic, Normal and Theatre Picture Modes
- sRGB
- Natural Colour Matrix™
- 3D CineView Line Doubler
- 3-mode Gamma Correction
- User Logo Capture Function
- 2 Live Picture-In-Picture
- Digital Expanded Zoom



REMOTE CONTROL

The XL8U comes with a compact card style remote control as standard. To further improve operating ease an optional System Operation Remote can be purchased, which can be programmed to control DVD players and video recorders connected to the projector.



Standard Remote



Optional System Operation Remote

INPUT AND OUTPUT TERMINALS


- 1 Mouse terminal for USB
- 2 Serial terminal RS-232C x 1 (8 pin)
- 3 PC/Component Video output (mini D-sub 15 pin)
- 4 PC/Component Video input (mini D-sub 15 pin)
- 5 S-Video/Video/Audio input




REPLACEMENT LAMP VLT-XL8LP



DIMENSIONS (UNITS: MM. INCH)

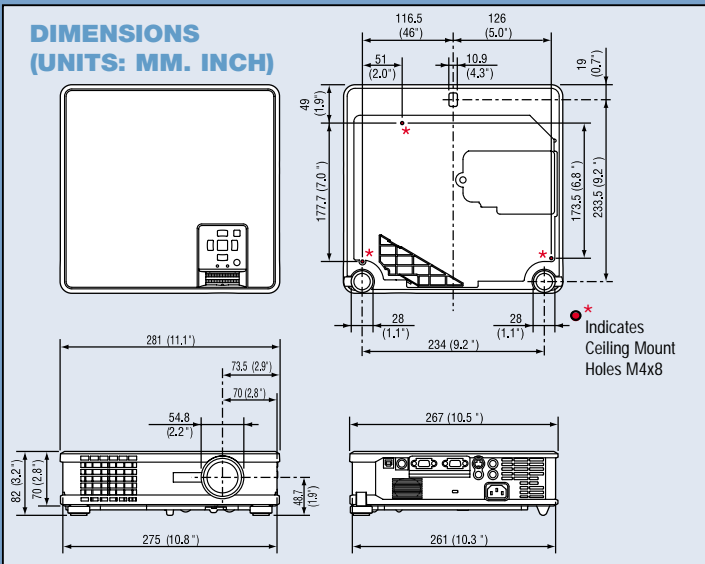

PROJECTION DISTANCE AND SCREEN SIZE

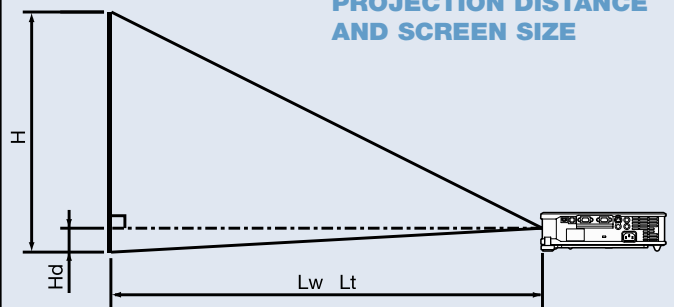

XL8U

Screen		Distance from screen				Height Projected					
Diagonal Size		Width		Height		Max. Zoom	Min. Zoom	Image(H)			
inch	cm	inch	cm	inch	cm	inch	m	inch	cm		
40	102	32	81	24	61	37	1.5	69	1.8	24	61
60	152	48	122	36	91	57	2.2	105	2.7	3.6	9.1
80	203	64	163	48	122	117	3.0	140	3.6	4.8	12.2
100	254	80	203	60	152	147	3.7	176	4.5	6.0	15.2
150	381	120	305	90	229	221	5.6	265	6.7	9.0	22.9
200	508	160	408	120	305	296	7.5	355	9.0	12.0	30.5
250	635	200	508	150	381	370	9.4	444	11.3	15.0	38.1
300	762	240	610	180	457	444	11.3	—	—	18.0	45.7

Mitsubishi Electric Europe B.V.
 Travellers Lane, Hatfield, Herts AL10 8XB
 Tel: 01707 278684 Fax: 01707 278541
 www.mitsubishielectric.co.uk/vis
 email: projector.info@meuk.mee.com



**MITSUBISHI
ELECTRIC**

Changes for the Better