



*Changes for the Better*

MULTIMEDIA DATA/VIDEO PROJECTORS

**Are you looking  
for something**

stylish, bright,  
fully-featured  
and compact?

well, here she is



# SL4U/XL4U

## multimedia data/video projectors

### TECHNICAL SPECIFICATIONS

Model	XL4U	SL4U
Display technology	0.7" Polysilicon panel x 3	0.7" Polysilicon panel x 3
Resolution	1024 x 768 (total 2,359,296 pixels), 600 video lines	800 x 600 (total 1,440,000 pixels), 600 video lines
Brightness	1500 lm	1700 lm
Colour	16,770,000 colours	16,770,000 colours
Zoom / focus	Manual control (zoom ratio 1.2:1)	Manual control (zoom ratio 1.2:1)
Picture size	40" ~ 300" (100" = 3.2m)	40" ~ 300" (100" = 3.2m)
Source lamp	180W / 2000hrs (normal mode), 160W / 3000hrs (low mode)	180W / 2000hrs (normal mode), 160W / 3000hrs (low mode)
Computer compatibility	VGA® ~ SXGA® (640 x 480 ~ 1280 x 1024) True: 1024 x 768, Sync on green available	VGA® ~ XGA® (640 x 480 ~ 1024 x 768) True: 800 x 600, Sync on green available
Video compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N) SECAM / PAL 60 / Component Video (DVD / HDTV) (480i, 576i, 480p, 576p, 720p, 1080i), SCART (RGB + 1V sync)	NTSC / NTSC 4.43 / PAL (including PAL-M, N) SECAM / PAL 60 / Component Video (DVD / HDTV) (480i, 576i, 480p, 576p, 720p, 1080i), SCART (RGB + 1V sync)
Input terminals	PC: mini D-sub 15 pin x 1, Video: RCA + S-Video x 1, Audio: RCA (L, R) x 1	PC: mini D-sub 15 pin x 1, Video: RCA + S-Video x 1, Audio: RCA (L, R) x 1
Output terminals	RGB: mini D-sub 15 pin x 1	RGB: mini D-sub 15 pin x 1
Communication terminals	RS-232C x 1 (8pin), mouse terminal for USB	RS-232C x 1 (8pin), mouse terminal for USB
Audio speaker	2 W Mono	2 W Mono
Dimensions (W x H x D)	275 x 70 x 261 mm / 10.8" x 2.8" x 10.3" (Excluding all protrusions)	275 x 70 x 261 mm / 10.8" x 2.8" x 10.3" (Excluding all protrusions)
Weight	2.7 kg / 5.9 lbs	2.7 kg / 5.9 lbs
Power supply	AC 100 ~ 240 V / ±10%, 50/60 Hz	AC 100 ~ 240 V / ±10%, 50/60 Hz

### GREAT FEATURES IN COMPACT BODY

- 3000Hrs Lamp Life (low mode)
- Anti-Theft Password
- Lightweight, Slim Design
- Dynamic, Normal and Theatre Picture Modes
- sRGB
- Digital Keystone Correction
- Natural Colour Matrix™
- 3D CineView Line Doubler
- 3-mode Gamma Correction
- User Logo Capture Function
- Digital Expanded Zoom



### REMOTE CONTROL

The SL4U/XL4U come with a compact card style remote control as standard. To further improve operating ease an optional System Operation Remote can be purchased, which can be programmed to control DVD players and video recorders connected to the projector.



### INPUT AND OUTPUT TERMINALS


- 1 Mouse terminal for USB
- 2 Serial terminal RS-232C x 1 (8 pin)
- 3 PC/Component Video output (mini D-sub 15 pin)
- 4 PC/Component Video input (mini D-sub 15 pin)
- 5 S-Video/Video/Audio input




### REPLACEMENT LAMP VLT-XL8LP



### DIMENSIONS (UNITS: MM. INCH)

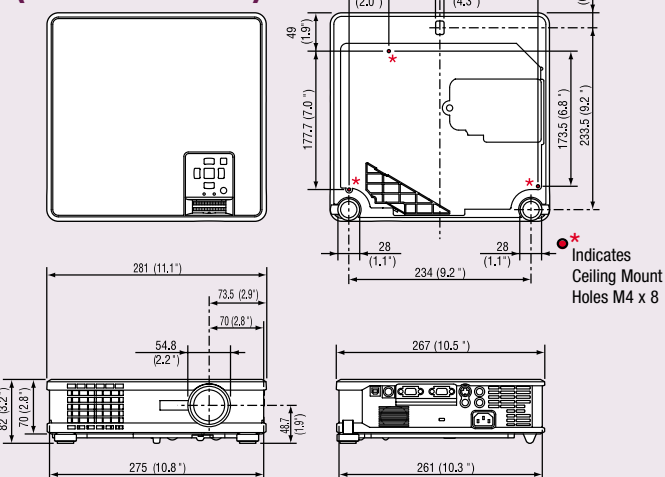

### PROJECTION DISTANCE AND SCREEN SIZE

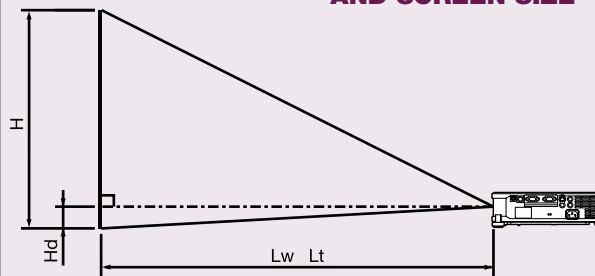

### XL4U/SL4U

Diagonal Size	Screen				Distance from screen				Height Projected		
	Width		Height		Max. Zoom		Min. Zoom		Image(H)		
inch	cm	inch	cm	inch	m	inch	m	inch	cm		
40	102	32	81	24	61	49	1.3	60	1.5	2.4	6.1
60	152	48	122	36	91	75	1.9	91	2.3	3.6	9.1
80	203	64	163	48	122	101	2.6	121	3.1	4.8	12.2
100	254	80	203	60	152	126	3.2	152	3.9	6.0	15.2
150	381	120	305	90	229	191	4.8	229	5.8	9.0	22.9
200	508	160	406	120	305	255	6.5	306	7.8	12.0	30.5
250	635	200	508	150	381	319	8.1	383	9.7	15.0	38.1
300	762	240	610	180	457	383	9.7	-	-	18.0	45.7

Mitsubishi Electric Europe B.V.  
 Travellers Lane, Hatfield, Herts AL10 8XB  
 Tel: 01707 278684 Fax: 01707 278541  
 www.mitsubishielectric.co.uk/vis  
 email: projector.info@meuk.mee.com

